



R-560A

Temperature: $-20^{\circ}\text{C} \sim 150^{\circ}\text{C}$
Pressure: $\leq 1.5 \text{ MPa}$
Velocity: $\leq 13 \text{ m/s}$

Температура: $-20^{\circ}\text{C} \sim 150^{\circ}\text{C}$
Давление: $\leq 1.5 \text{ МПа}$
Скорость: $\leq 13 \text{ м/сек}$

COMBINED MATERIALS


- 1 Rotary Face: Carbon/SiC
- 2 Stationary Seat: Ceramic/SiC/TC
- 3 Flexible Member: NBR/VITON/EPDM
- 4 Spring: Stainless Steel
- 5 Metal Parts: Stainless Steel

Материалы

- 1 Вращающееся кольцо: Ceramic/SiC
- 2 Неподвижное кольцо: Carbon/SiC
- 3 Сильфон: NBR/EPDM/VITON.
- 4 Пружина: Правая (R) / Левая (L).
- 5 Металлические части: SS304/SS316.

Неподвижное кольцо

Тип (mm): R-LD

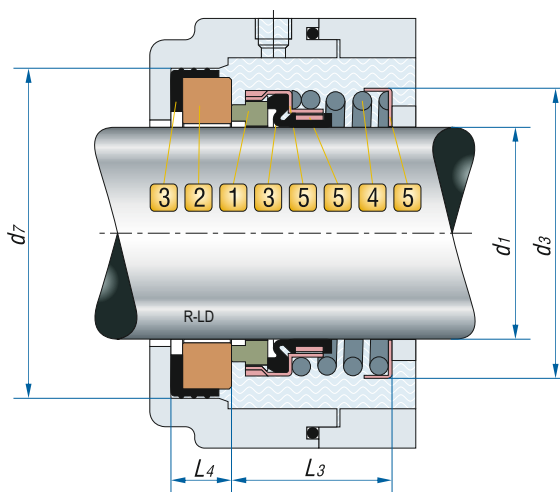

R-560A

	d1 (h6)	d3 (Max)	d7 (H8)	L3 (± 0.5)	L4
R-560A-8	8	20.5	21.0	11.5	6.5
R-560A-9	9	20.5	24.0	16.5	6.5
R-560A-10	10	20.5	24.0	16.5	6.5
R-560A-11	11	22.5	24.0	16.5	6.5
R-560A-12	12	22.5	26.0	17.5	6.5
R-560A-13	13	24.5	26.0	17.5	6.5
R-560A-14	14	24.5	28.0	18.5	6.5
R-560A-15	15	26.5	28.0	18.5	6.5
R-560A-16	16	26.5	32.0	20.0	7.0
R-560A-17	17	26.5	32.0	20.0	7.0
R-560A-18	18	30.5	35.0	20.0	7.0
R-560A-19	19	30.5	35.0	20.0	7.0
R-560A-20	20	34.0	38.0	19.5	8.5
R-560A-22	22	36.0	40.0	19.5	8.5
R-560A-24	24	40.0	44.0	20.5	8.5
R-560A-25	25	40.0	44.0	20.5	8.5
R-560A-28	28	42.0	46.0	21.0	9.0
R-560A-30	30	45.0	50.0	22.0	9.0

	d1 (h6)	d3 (Max)	d7 (H8)	L3 (± 0.5)	L4
R-560A-32	32	47.0	54.0	24.0	9.0
R-560A-35	35	50.0	58.0	25.5	10.5
R-560A-38	38	55.0	60.0	26.5	10.5
R-560A-40	40	57.0	64.0	27.0	11.0
R-560A-45	45	61.5	66.0	29.0	11.0
R-560A-48	48	65.5	67.0	31.0	11.0
R-560A-50	50	67.5	72.0	31.0	11.0
R-560A-54	54	72.0	76.2	42.8	14.2
R-560A-55	55	72.0	79.4	42.8	14.2
R-560A-58	58	78.5	79.4	42.8	14.2
R-560A-60	60	80.0	82.5	45.8	14.2
R-560A-65	65	84.5	85.7	49.0	16.0
R-560A-70	70	90.0	88.9	49.0	16.0
R-560A-73	73	94.0	95.3	53.0	16.0
R-560A-75	75	99.0	98.4	53.0	16.0