


R-128 R-128P

Temperature: -20°C~200°C
Pressure: ≤0.8 MPa
Velocity: ≤10 m/s

Температура: -20°C~200°C
Давление: ≤0.8 мПа
Скорость: ≤10 м/сек



R-128

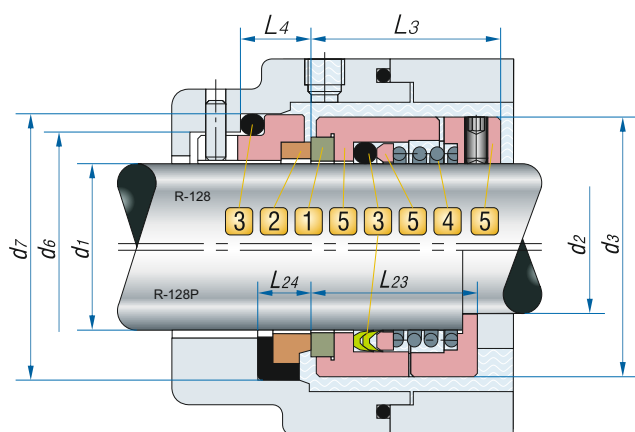

R-128

	d1 (h6)	d3 (Max)	d6	d7 (H8)	L3 (±0.5)	L4
R-128-20	20	34	29	35	35.0	10.0
R-128-22	22	36	31	37	35.0	10.0
R-128-25	25	39	34	40	40.0	10.0
R-128-28	28	42	37	43	40.0	10.0
R-128-30	30	44	39	45	40.0	10.0
R-128-35	35	49	44	50	45.0	10.0
R-128-38	38	54	49	56	44.0	11.0
R-128-40	40	56	51	58	44.0	11.0
R-128-45	45	61	56	63	49.0	11.0
R-128-50	50	66	62	70	47.0	13.0
R-128-55	55	71	67	75	57.0	13.0
R-128-60	60	80	72	80	57.0	13.0
R-128-65	65	85	77	85	67.0	13.0
R-128-70	70	90	83	92	64.7	15.3
R-128-75	75	99	88	97	64.7	15.3


R-128P

	d1 (h6)	d2	d3 (Max)	d6	d7 (H8)	L23 (±0.5)	L24
R-128P-18	18	14	32	27	33	19.5	6.5
R-128P-20	20	16	34	29	35	19.5	6.5
R-128P-22	22	18	36	31	37	22.0	6.5
R-128P-25	25	20	39	34	40	25.0	8.0
R-128P-28	28	23	42	37	43	27.5	8.5
R-128P-30	30	25	44	39	45	27.5	8.5
R-128P-35	35	30	49	44	50	29.5	8.5
R-128P-38	38	33	54	49	56	30.5	9.5
R-128P-40	40	35	56	51	58	30.5	9.5
R-128P-45	45	40	61	56	63	30.5	9.5




R-128P

1 Вращающееся кольцо




SIC/TC


2 Неподвижное кольцо



Carbon



SIC/TC



SIC/TC

3 Сильфон

- Nitrile: NBR
- Ethylene-Propylene: EPDM
- Fluorocarbon: VITON
- Pure PTFE: PTFE

4 Пружина

SUS304

5 Металлические части

SUS304